

Add Serialization to Label


Following the steps below you will be able to add serialization to a label and how to reset the count

Required Tools

- Beginner knowledge of CD Designer
- Beginner knowledge of QuickDisc

Create the serialization field

1. Click on the **Add Text** icon, selecting **single line**
2. Click on the disc to place a text field called Sample Text
3. Right-click on the text and select **Properties**. The *Text Properties* box opens to the Data Source tab.
Note: If it loads to a different tab, click on the Data Source tab
4. In the Embedded Data section type **Serial#: 01**
5. Click on the **Transforms tab**
6. On the Serialization line click on the Option button to the right of the line. The *Serialization* option page loads
7. On the Serialization option page select the following options
 - a. Increment
 - b. Preserve the number of characters
 - c. Remaining options can be left at default
8. Click on **Reset** tab
9. Check **Specified value is reached** box.
10. Set the Value field to the max number of labels to be printed
11. Press **OK**
12. Save the label

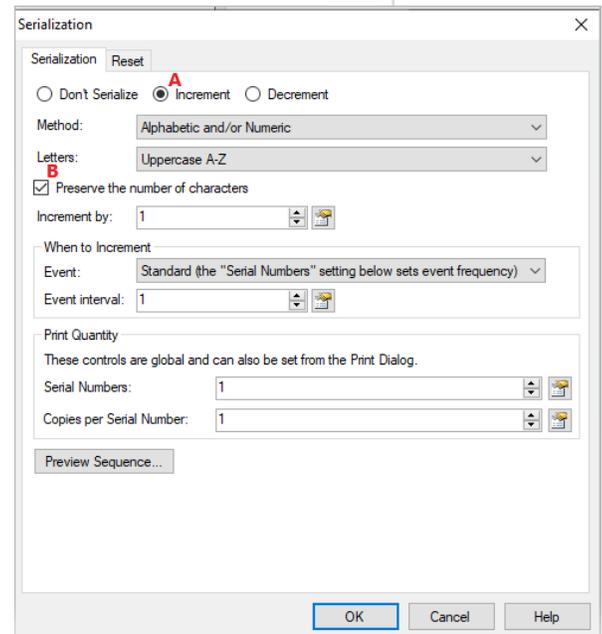

Reset the serialization field

1. Right-click on the serialization text field that will be reset and select **Properties**. The *Text Properties* box opens.
2. Click on **Transforms** tab
3. Click on **Reset** tab
4. On the Serialization line click on the Option button to the right of the line. The *Serialization* option page loads
5. Click on **Reset** tab
6. In Reset Value option set the number to reset the serialization number to
7. Click **Reset Now** button
8. Press **Ok**
9. Save the label.



Using Serialization Label in QuickDisc

1. After selecting the serialization label press **Settings**
2. Click on Printing from the menu on the right
3. Change the Save label counter when printing from Don't Save to Save
4. Press **OK**